




Hexagon Cutting Technique

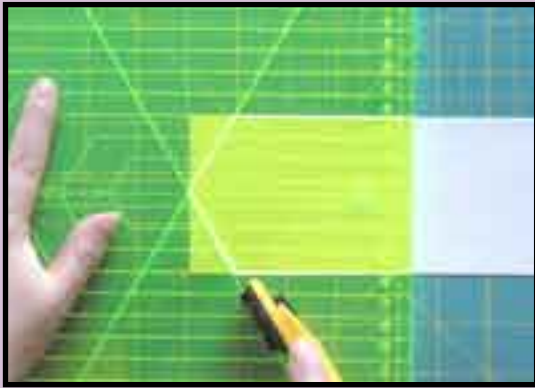

Center the fabric strip between the lines for your width strip (in this picture we're using 3"). Put the end of the fabric strip under the center of the "X" on your template. Cut the strip ends off with your rotary cutter; this makes the beginning of your first hexagon.

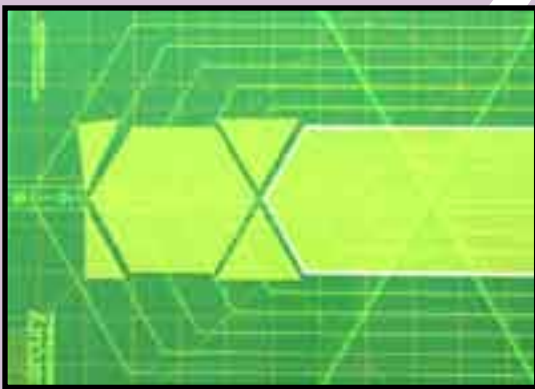

Slide the template along the fabric strip. Since we're cutting 3" hexagons, we'll move the end that you just cut so it matches the 3" hexagon line engraved on the template. Make sure you keep the strip parallel to the lines engraved on the template. Cut the strip with your rotary cutter in the "X" channels. This cuts one hexagon free, and makes the first cut on your next hexagon at the same time! This picture illustrates one hexagon cut, and one ready to be cut.

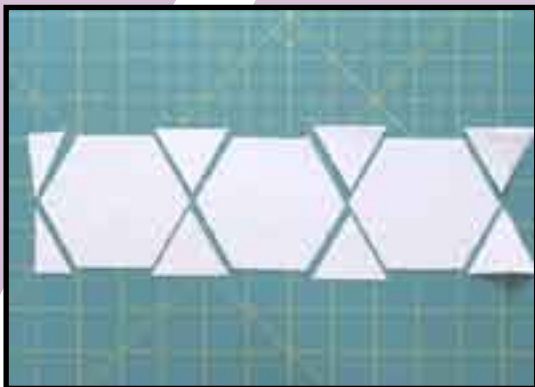

Once your strip is cut, you can easily produce hexagons like this **VERY** quickly - these were cut in about **10 seconds**. Imagine how much time and effort you'll save when compared to traditional methods of marking and cutting!



This picture shows the 1/4" seam allowance line in use - machine quilters can easily mark sewing guidelines without reaching for an additional ruler. Use this guideline on all shapes having straight edges.